

PARTS SUPPLIED

QTY	Description	#
1	2019 Live Valve sensor bracket kit	
4	FK 7/8 X 3/4 RHT heim joints	10
4	7/8-14 RHT jam nuts	9
4	3/8-24 x 1.25" SHCS (zinc) bolts	12
8	3/8 AN960 washers	13
4	3/8-24 MS21042 flanged nuts	14
8	Frame pivot heim spacers	6
2	9/16" tapered uniball spindle adaptors	5
2	9/16" upper uniball spacers	4
2	9/16-18 x 4.5" SHCS bolts	15
2	9/16 SAE flat washers	16
2	9/16-18 stover nuts	17
2	Uniball cover caps	7
2	Uniball cover cap o-rings	18
12	6-32 x 3/8 BH torx screws (zinc)	11
4	Camburg 8.5" Stickers	

** REFER TO EXPLODED CAD DRAWING ON **
 ** OTHER SIDE FOR PARTS REFERENCE NUMBERS **



(SAMPLE IMAGE)

Thanks for purchasing a set of our Camburg KINETIK series billet upper a-arms for your vehicle. Please follow all instructions. If you are not installing these yourself have a qualified shop do so. These arms are designed for 1-3" of lift from coilovers and to be used with stock OEM spindles or Camburg performance spindles. These are NOT designed to be used with cheap spacer type lifts. Make sure to check the parts list to make sure you have every component prior to starting. Camburg Engineering has made every attempt to insure you receive the highest quality components in the most complete manner. This is a guide to help you through the process with recommended torque specs. It's your responsibility to ensure parts are being installed correctly using the correct tools and procedures.

Tools & Supplies Required

Eye protection | Jack | Jack Stands | 21mm socket & wrench | 2-3 lb. mini sledge hammer | 1-1/4" open-end wrench | 7/16" socket | 7/16" allen driver | 7/8" socket | 5/16" allen driver | T15 torx driver | Torque wrench | Brake cleaner | Anti-seize | Grease | Red Loctite | Blue painters tape

1.0 Setup

Park the vehicle on level ground and set the parking brake and chock the rear wheels. Jack up the front end until the tires are off the ground. Place jack stands under the frame rails and set down. Jack up the driver side lower arm to only raise the tire off the ground, remove the wheel and keep jack under lower a-arm to support the suspension.

2.0 Removal

Using a 21mm socket, loosen the nut from on the upper ball-joint where it connects to the spindle but do not fully remove. With a mini sledge hammer strike the top of the spindle numerous times to release the ball-joint tapered stud. This can be a little difficult since it's a press fit, heating up the spindle to get it to expand will help. Once the ball joint releases from the spindle, then remove the nut. This will allow you to position the upper arm and spindle out of the way so you can remove the coilover/strut to access the upper arm bolts at the frame. Refer to your coilover instructions or service manual for details. Once the coilover is removed use a 21mm socket & wrench to loosen and remove the OEM upper a-arm bolts. Remove the stock upper arm.

3.0 Pre-Installation

On **2019** models with FOX Live Valve electronic suspension you will need to remount the position sensor on the frame and install the our stainless heim brackets for the linkage. See the supplemental instructions included with those parts.

We recommend putting blue painters tape on the billet arms for protection during installation. Thread the 7/8" jam nuts onto the heims then apply anti-seize compound on the exposed threads. Thread the heims into the upper arm so the heim is vertical and the jam nut makes contact with the arm and you have 3 threads exposed past the nut. Install the 3/8" allen heim pinch bolts into the arm. With a drop of red Loctite on the nut tighten and torque to 20-22 ft/lbs. Use a 1-1/4" open-end wrench to fully tighten the jam nut using another wrench to hold the heim vertical (perpendicular to the arm) so it doesn't rotate.

Now you'll install the heim pivot spacers. We recommend coating the surface that slips into the heim with a little anti-seize.

4.0 Installation

Install the driver side Camburg upper arm into the frame using the original hardware in the same orientation as it was removed. Our arms are built with higher precision and tighter tolerances than the factory arms, so it will be a tighter fit into the frame. You may need to pry the outer tabs out very slightly to make it easier to install. When the stock arms are tightened from the factory it bends the tabs slightly in. Use a 21mm wrench and 21mm socket and torque to 110 ft/lbs.

Inspect and clean the tapered hole in the spindle/knuckle. Insert the tapered lower uniball spacer into the uniball. Then install the upper spacer into the top of the uniball making sure both spacers are fully seated. If not, damage will occur in the following steps. Install the 9/16" bolt through the spacers and uniball and attach the upper arm to the spindle by swinging it down to the spindle with some finesse. You may need to jack up the lower arm and move the uniball joint. The tapered spacer should sit almost flush with the top of the spindle before tightening. Make sure the lower spacer did not pull out slightly from the uniball or damage will occur as the spacer can get caught on the bearing race and/or snap ring. Install the 9/16" washer and stover lock nut with a small amount of red Loctite onto clean threads. Using a 7/16" allen driver and 7/8" socket, torque to 120-125 ft/lbs. Do not over-tighten or use an impact gun.

Due to the extreme and punishing nature of offroad use, Camburg Engineering products have no implied or expressed warranty. Camburg Engineering products and components are designed and manufactured for offroad use only. Installing most suspension products will raise the center of gravity of the vehicle and can increase the susceptibility to a rollover and alter the handling characteristics. Camburg Engineering products may void the vehicles warranty, check with your local dealer. The loss of use of the product, loss of time, inconvenience, removal, shipping costs, commercial loss or consequential damages are not covered. Camburg Engineering reserves the right to change the design, material or specifications of any product without assuming any obligation to modify any product previously manufactured and without prior notice. Every effort has been made to avoid printing errors and specifications. By installing and/or using these products you are accepting these stated conditions and accept all liability and responsibility.

4.0 Installation Continued ...

Lastly install the driver side uniball cover by first installing the supplied o-ring. Then the supplied 6-32 hardware using a T15 torx driver with grease on the threads. Get this hand tight only and do not over-tighten.

Repeat steps 1 through 4 to install passenger side arm

5.0 Alignment

You will need to have your vehicle aligned by a qualified shop. Additional caster is built into the Camburg arms to correct alignment issues that are inherent with lifting the vehicle. Have your alignment shop increase/maxout positive caster, then set camber and toe to factory OEM specifications. Having an increase in caster helps with straight line stability and cornering precision for performance driving on and off-road. You can also adjust the heim joints to correct camber as well if needed.

6.0 Maintenance & Care

Use mild soap and water to clean the anodized aluminum surfaces, using chemicals can stain/dis-color the finish. Uniballs and heim joints are precision parts with tight tolerances which can lead to occasional noise when they become dirty. Occasionally wipe off the heim joints and underside of the uniball with a clean rag to remove road grime and dirt. Cleaning and lubricating them with WD-40 or a PTFE dry film lube like "Tri-Flow" can minimize any noise from stiction. Do not use harsh chemicals or grease/oil that attracts dirt to clean & lubricate the uniball as it will damage and wear the PTFE liner that is bonded internally. You will also need to occasionally remove the uniball cover to clean the top-side of the uniball. Neglecting care and upkeep will wear parts out faster.

Inspect and re-torque all hardware and components after 500 miles and whenever using the truck off-road.


Notes

Recommended tire size: 35-37" x 12.50"

Recommended wheel size: 17 X 8-9"

Maximum wheel backspacing = 5.75"

When using the OEM 17" wheels, you may need a 1/4" - 3/8" wheel spacer when running larger 37" or wider tires than stock as the tire may rub the upper arm at full turn. We recommend a zero offset wheel when running 37" tires that has 4.75" backspacing.

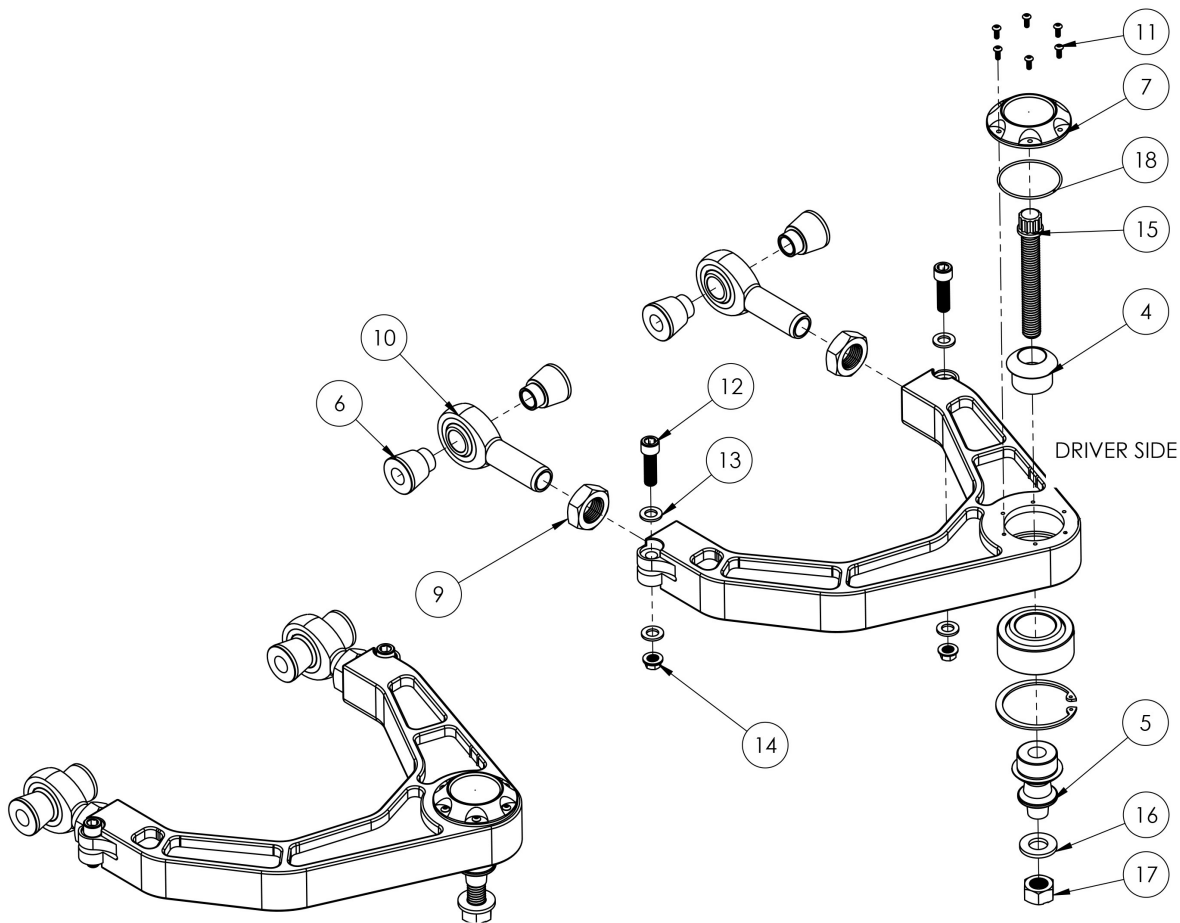

TORQUE TO 120-125 FT/LBS. W/ RED LOCTITE

Due to the extreme and punishing nature of offroad use, Camburg Engineering products have no implied or expressed warranty. Camburg Engineering products and components are designed and manufactured for offroad use only. Installing most suspension products will raise the center of gravity of the vehicle and can increase the susceptibility to a rollover and alter the handling characteristics. Camburg Engineering products may void the vehicles warranty, check with your local dealer. The loss of use of the product, loss of time, inconvenience, removal, shipping costs, commercial loss or consequential damages are not covered. Camburg Engineering reserves the right to change the design, material or specifications of any product without assuming any obligation to modify any product previously manufactured and without prior notice. Every effort has been made to avoid printing errors and specifications. By installing and/or using these products you are accepting these stated conditions and accept all liability and responsibility.