

### PARTS SUPPLIED

QTY	Description	ID
8	Polyurethane pivot bushings	2
8	Large flat washers (plated)	3
4	7/8" od x 0.635" id x 2.335" sleeves	1
4	90 deg. zerk grease fittings (self tapping)	4
2	M16 x 1.50 steel nyloc nuts	16
4	10-32 X 3/4" steel SHCS allen bolts	5
8	10-32 stainless flat washers	6
4	10-32 steel nyloc nuts	8
4	1/4" stainless rubber insulated clamps	7
2	X-joint press-on caps	12
2	X-joint cap o-rings	13
2	X-joint hardware kits (zerk fitting, castle nut and cotter pin)	9-11
4	Bushing grease packets	
4	Camburg 8.5" Stickers	

Thanks for purchasing a set of our Camburg X-joint performance upper a-arms for your vehicle. Please follow all instructions. If you are not installing these yourself have a qualified shop do so. These arms are designed for 1-3" of lift from coilovers and to be used with stock OEM spindles or Camburg performance spindles. These are NOT designed to be used with cheap spacer type lifts. Make sure to check the parts list to make sure you have every component prior to starting. Camburg Engineering has made every attempt to insure you receive the highest quality components in the most complete manner. This is a guide to help you through the process with recommended torque specs. It's your responsibility to ensure parts are being installed correctly using the correct tools and procedures.

#### Tools & Supplies Required

Eye protection | Jack | Jack stands | Needle nose pliers  
2-3 lb. mini sledge hammer | Rubber mallet | 8mm socket  
10mm socket | 19mm socket | 22mm socket & wrench  
24mm socket | 1/4" wrench | 3/8" wrench | 5/32" allen wrench  
Torque wrench | Grease gun | Brake cleaner | Red loctite

#### 1.0 Setup

Park the vehicle on level ground and set the parking brake and chock both rear wheels. Jack up the front end from the chassis until the front tires are off the ground. Place jack stands under the front frame rails and set down. Make sure the vehicle is supported correctly and the front tires are still off the ground. Place the jack under the driver side lower arm and raise the tire 1/2", then remove the wheel while keeping jack under lower a-arm to support the suspension. Read these instructions start to finish before moving forward and review diagrams.

#### 2.0 Removal

Using needle nose pliers, remove the cotter pin from the upper ball-joint at the spindle. Using a 19mm socket, loosen the castle nut but do not fully remove. With a mini sledge hammer strike the top of the spindle numerous times to release the ball-joint tapered stud. This can be a little difficult since it's a press fit, heating up the spindle to get it to expand will help. Once the ball joint releases from the spindle, then remove the nut. This will allow you to position the upper arm and spindle out of the way. Make sure to position & support the spindle so that it doesn't pull on the brake line and on 4wd models that it doesn't pull out the inner CV or strain the CV boots and axles. Use a 10mm socket to temporarily disconnect the battery cable wiring harness clamp from the inner fender and push aside (driver side only). Using a 22mm socket & wrench, loosen and remove the OEM upper a-arm bolt. Then remove the stock upper arm.

#### 3.0 Pre-installation

Using an 8mm socket, install the straight grease zerk fitting into the top of the X-joint. Do not over tighten. Using a 1/4" wrench install the self-tapping zerk fittings into the Camburg arms. Do not bottom out the fittings into the arms. Position them pointing outward for grease gun access.

.... Now press the polyurethane bushings into the arms. Using the supplied bushing grease, apply grease onto the OD of the inner pivot sleeves and press into the bushings. Wipe excess grease onto outer bushing face and apply additional grease if needed. See diagram for reference.

#### 4.0 Installation


Install the driver side Camburg upper arm to the frame using the original M16 bolt with four of the supplied zinc-plated washers on either side of the polyurethane bushings. To insure you're installing the correct arm, the zerk fittings will be pointed downward, pivot gussets are on top and the longer a-arm tube towards the front of the vehicle. With the bolt pushed all the way through clean the threads using brake cleaner and install the supplied nyloc nut with red loctite. Using a 22mm wrench and 24mm socket, torque to 120 ft/lbs. See diagram for reference.

Cycle the arm up and down to make sure there are no clearance issues. Prior to installing the X-joint stud into the spindle, make sure the spindle taper is clean and free of debris. Swing down the upper arm so the X-joint stud inserts into the spindle. Using a 19mm socket torque to 85 ft/lbs. Do not over-tighten or use an impact gun. Install the new cotter pin through the castle nut. You may need to slightly tighten to align the castle nut slot to the hole in the X-joint stud.

Using the supplied 10-32 hardware and rubber clamps, attach the speed sensor wire to the backside of the upper arm using a 5/32" allen and 3/8" wrench. Make sure to route the wire so that it has proper clearances and tension.

Now slightly bend back & inward the sheet metal tab on the inner fender behind the upper arm for added clearance. If not the upper arm and speed sensor wire can make contact and incur damage. See diagram for reference.

**Now you need to grease the X-joint, if not damage will occur.** Using a grease gun with a high quality hi-temp lithium complex grease, slowly pump grease into the joint making sure not to over grease or over pressurize.

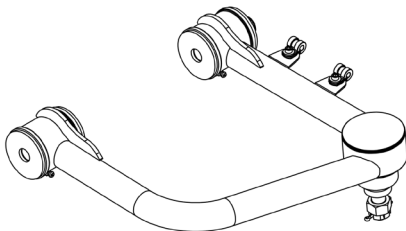

Due to the extreme and punishing nature of offroad use, Camburg Engineering products have no implied or expressed warranty. Camburg Engineering products and components are designed and manufactured for offroad use only. Installing most suspension products will raise the center of gravity of the vehicle and can increase the susceptibility to a rollover and alter the handling characteristics. Camburg Engineering products may void the vehicles warranty, check with your local dealer. The loss of use of the product, loss of time, inconvenience, removal, shipping costs, commercial loss or consequential damages are not covered. Camburg Engineering reserves the right to change the design, material or specifications of any product without assuming any obligation to modify any product previously manufactured and without prior notice. Every effort has been made to avoid printing errors and specifications. By installing and/or using these products you are accepting these stated conditions and accept all liability and responsibility.

Lastly install the X-joint cap by first installing the supplied o-ring into the caps groove. Then apply a small amount of grease to the inside of the top of the upper arm cup. Use the supplied 30# fishing line and insert 2" of it into the upper arm cup. This will be used to release the trapped air as the cap is pressed on. Position and center the cap over the cup with the Camburg logo in your desired position. Cover the cap with a rag to protect the finish and use a rubber mallet to tap the cover in if not by hand. Make sure to apply even pressure so that it presses in straight. When the cap is fully seated and you hear the air escape, pull the fishing line out and make sure the cap is tight to the cup. Twist the cap a few degrees to the right and left to help seat the cap and o-ring. Periodically check the caps to make sure they are fully seated after off-road use.

**Repeat steps 1 through 4 to install passenger side arm**

### 5.0 Alignment

You will need to have your vehicle aligned by a qualified shop. Additional caster is built into the Camburg arms to correct alignment issues that are inherent with lifting the vehicle. Have your alignment shop increase/maxout positive caster, then set camber and toe to factory OEM specifications. Having an increase in caster helps with straight line stability and cornering precision for performance driving on and off-road.

### 6.0 Maintenance & Care



Over time the pivot bushings will also need to be cleaned and lubricated. Use grease that's designed specifically for polyurethane bushings. Not using the correct grease can cause the bushings to squeak abnormally and wear faster. The best method to grease the bushings is to remove the arms from the vehicle, disassemble, clean and lubricate. When using a grease gun, do so slowly. Most grease guns operate at 1500+ psi. and can damage the bushings applying too much pressure too fast. Neglecting care and upkeep will wear parts out faster.

We recommend greasing the poly bushings and X-joints 1-2 times per year or every 6-10k miles depending on use.

Inspect and re-torque all hardware and components after 500 miles and whenever using the truck off-road.

### Notes:

- Recommended tire size: 33-18"
- Recommended wheel size: 17-18"
- Maximum wheel backspacing = 6.00"

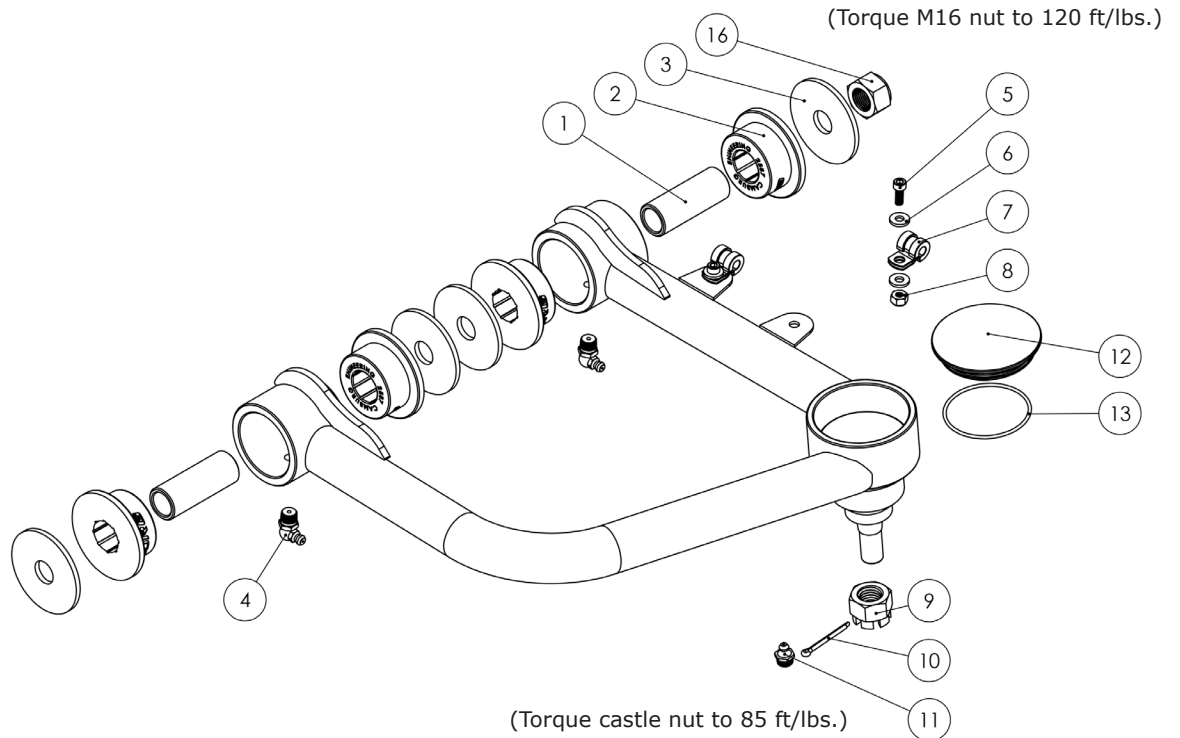

Due to the extreme and punishing nature of offroad use, Camburg Engineering products have no implied or expressed warranty. Camburg Engineering products and components are designed and manufactured for offroad use only. Installing most suspension products will raise the center of gravity of the vehicle and can increase the susceptibility to a rollover and alter the handling characteristics. Camburg Engineering products may void the vehicles warranty, check with your local dealer. The loss of use of the product, loss of time, inconvenience, removal, shipping costs, commercial loss or consequential damages are not covered. Camburg Engineering reserves the right to change the design, material or specifications of any product without assuming any obligation to modify any product previously manufactured and without prior notice. Every effort has been made to avoid printing errors and specifications. By installing and/or using these products you are accepting these stated conditions and accept all liability and responsibility.